


CATEGORY - PU



WT 8304

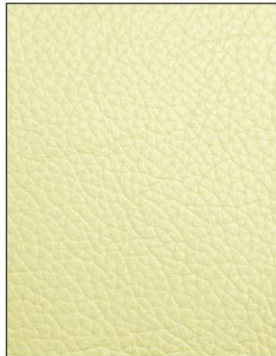

BG 10386



BN 30594



BN 30593




BN 30580



BN 30579



BK 0010

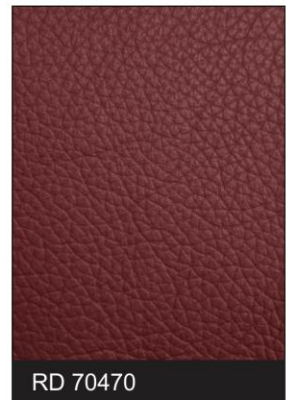


RD 70470

SPECIFICATION

THICKNESS	: 1.05 - 1.20mm
BREAKING STRENGTH	: L-30kg / In(min) T-20kg / In(min)
TEAR STRENGTH	: L-3.0kg(min) T-3.0kg(min)
FLEXIBILITY	: 400,000 cycles
BOND STRENGTH	: 1.5kg / 2cm(min)
STRETCH	: L-10-40% T-100-200%
PERMANENT SET	: L-5%(max) T-40%(max)
ELONGATION UNDER 14kg LOAD	: 100-180%
SCRATCH RESISTANCE	: YES



GY 9440

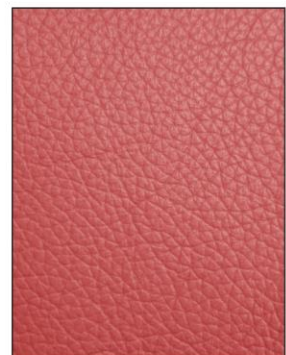

RD 70579